


SDR11 ELECTROFUSION EQUAL TEES

Water - 240 PSI at 73 Deg F Sustainable
Maximum Operating Pressure

Gas - 150 PSI at 73 Deg F Sustainable
Maximum Operating Pressure

- Suitable for Water, Fluids & Slurry's
- Engineered for PE3408, PE4710 & PE100 HDPE Pipe Systems
- Manufactured in accordance with ASTM F-714, ASTM F-1055, ASTM D-2513, ASTM D-3035, ASTM D-3261, ASTM D-3350, AWWA C-901, AWWA C-906, DIN16963, EN1555, EN12201 ISO-9001 Certified

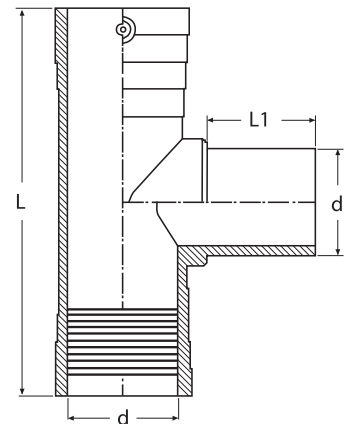

TYPE A



TYPE B



TYPE C

| Nominal Pipe Size d | Base Norm | L | L1 | Unit Weight in lbs. | Item Code | TYPE |
|------------------------|-----------|-------|------|------------------------|-------------------|------|
| 3/4" IPS | IPS | 4,25 | 1,46 | 1,59 | 30.ET1.11.11.0026 | A |
| 1" CTS | CTS | 5,04 | 1,61 | 0,29 | 30.ET1.33.11.0028 | A |
| 1" IPS | IPS | 5,04 | 1,61 | 0,29 | 30.ET1.11.11.0033 | A |
| 1 1/4" IPS | IPS | 6,38 | 1,93 | 0,37 | 30.ET1.11.11.0042 | A |
| 1 1/2" IPS | IPS | 6,38 | 1,93 | 0,68 | 30.ET1.11.11.0048 | A |
| 2" IPS | IPS | 7,32 | 2,40 | 1,26 | 30.ET1.11.11.0060 | A |
| 3" IPS | IPS | 10,04 | 2,91 | 3,26 | 30.ET1.11.11.0088 | A |
| 4" IPS | IPS | 11,93 | 3,11 | 5,86 | 30.ET1.11.11.0114 | A |
| 6" IPS | IPS | 19,00 | 4,75 | 11,46 | 30.ET1.11.12.0168 | B * |
| 8" IPS | IPS | 19,00 | 5,20 | 36,15 | 30.ET1.11.12.0219 | C * |

* 200 PSI